


# M10092 – 9 7/8” CN64SS

## Product specification

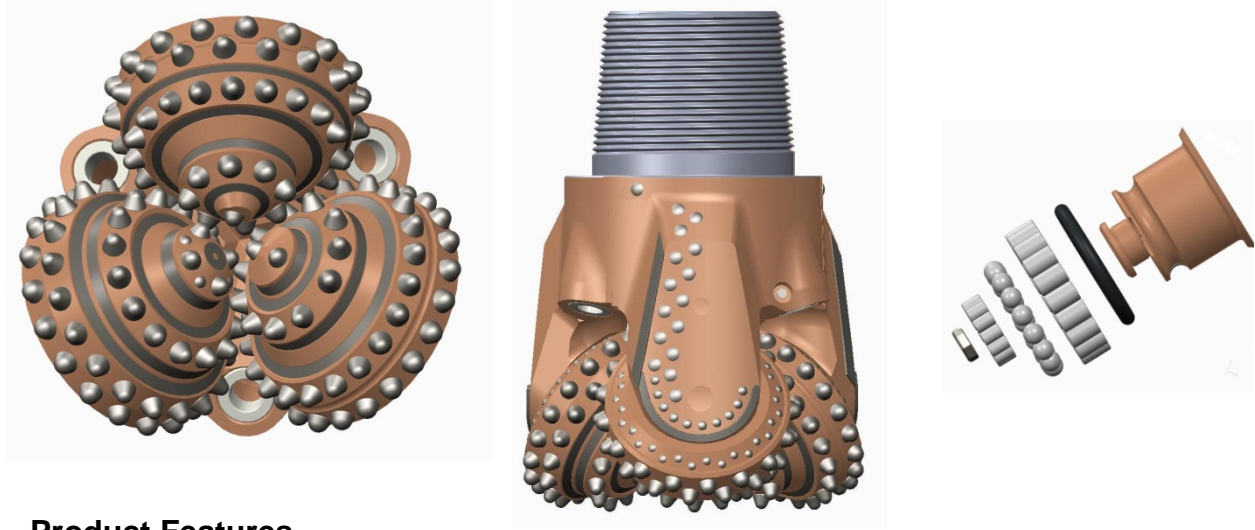

### Product Features

- Blunt Conical Button on Gauge
- Full shirrtail protection for medium hard formations and moderately abrasive formations
- Double row gauge protection with spherical inserts
- Hard facing on cone nose to minimize the coring for abrasive formation

### Product Specifications

Size / Type	9 7/8”	Cutting structure	TCI
IADC	6-3-5	Rows	3 - Gage / 11 – Inner
Pin Connection	6 5/8” API Regular	Insert count	58 - Gage /120 – Inner
Bearing	Sealed roller Bearing	Gage inserts	Blunt Conical
Circulation type	Jet	Inner inserts	Conical
Product weight	57 kg	Shirrtail protection	Full
Nozzle	3 x Side jet	Shirrtail insert	Spherical

### Operating parameters

Weight on Bit : 39,500 – 69,000 lbs.  
 Rotary Speed (RPM) : 50 - 120  
 Rock UCS : Between 30,000 to 45,000 PSI

*Operating parameters are typical ranges and may vary depending on ground conditions*