


2 15/16" (3-3-1) (W5058)

Product specification

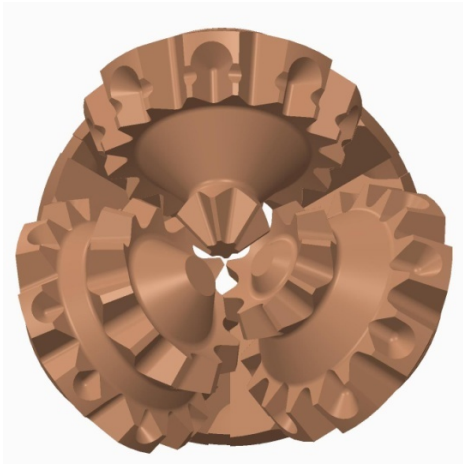

Product Features

- U-milling on gauge row
- Steel tooth standard open bearing bit for hard semi abrasive and abrasive formation

Product Specifications

Size / Type	2 15/16"	Cutting structure	ST
IADC	3-3-1	Rows	3- Gage / 3 – inner
Pin Connection	N-rod" Thread	Teeth count	26– Gage / 26- Inner
Bearing	Ball Friction	Teeth Type	straight
Circulation type	Centre Flush	Gage Protection	Hard facing
Product weight	2kg	Shirttail protection	---
Nozzle	-NA-	Shirttail insert	---

Operating parameters

- Weight on Bit : 11,500 - 20,500 lbs.
 Rotary Speed (RPM) : 60 – 80 RPM
 Rock UCS : Between 10,000 to 22,000 PSI

Operating parameters are typical ranges and may vary depending on ground conditions