



# 5 5/8" (2-3-1)(W5525)

## Product specification

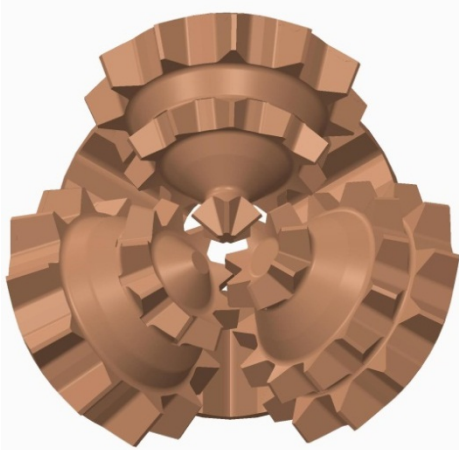

### Product Features

- Conventional gage teeth
- 1/3<sup>rd</sup> shirrtail protection for soft to medium hard and moderately abrasive formations

### Product Specifications

Size / Type	5 5/8"	Cutting structure	ST
IADC	2-3-1	Rows	3- Gage / 5 – inner
Pin Connection	3 1/2" API Regular	Teeth count	34– Gage / 43- Inner
Bearing	Roller Ball Friction	Teeth Type	Straight
Circulation type	Centre Flush	Gage Protection	Hard facing
Product weight	11 kg	Shirrtail protection	2/3 <sup>rd</sup> Hard facing
Nozzle	-NA-	Shirrtail insert	Serrated

### Operating parameters

Weight on Bit : 16,500 – 28,000 lbs.  
 Rotary Speed (RPM) : 60 – 100 RPM  
 Rock UCS : Between 2,500 to10,000 PSI

*Operating parameters are typical ranges and may vary depending on ground conditions*