
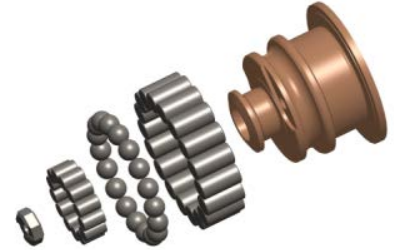


# M10058-10 5/8" CN40

## Product specification

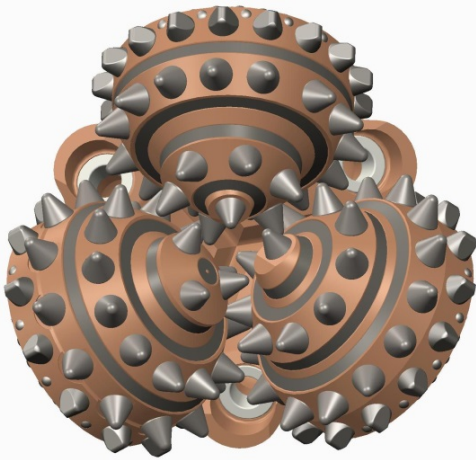

### Product Features

- Gage chisel button on Gage
- 2/3<sup>rd</sup> shirttail protection for soft to medium hard formations and moderately abrasive formations.
- Small inserts between gage and adjacent row for cone shell protection
- Spherical inserts on gage protection

### Product Specifications

|                  |                    |                      |                        |
|------------------|--------------------|----------------------|------------------------|
| Size / Type      | 10 5/8" CN40       | Cutting structure    | TCI                    |
| IADC             | 4-2-2              | Rows                 | 3 - Gage / 9 – Inner   |
| Pin Connection   | 6 5/8" API Regular | Insert count         | 43 - Gage / 72 – Inner |
| Bearing          | Open Air Bearing   | Gage inserts         | Gage chisel            |
| Circulation type | Jet                | Inner inserts        | Conical                |
| Product weight   | 65 kg              | Shirttail protection | 2/3 <sup>rd</sup>      |
| Nozzle           | 3 x Side jet       | Shirttail insert     | Spherical              |

### Operating parameters

Weight on Bit : 10,500 to 53,000 lbs.  
 Rotary Speed (RPM) : 50 - 150  
 Rock UCS : Between 5,000 to 12,500 PSI

*Operating parameters are typical ranges and may vary depending on ground conditions*